


128384 USB4 Gen 2x2 C to C Cable, 3.0m, 20Gbps, PD 240W, 4K@60Hz, DP Alt Mode, Black

Product Images



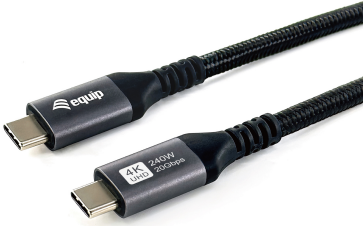

USB 4
Gen 2x2 20 Gbps

USB3.1 10 Gbps

USB3.0 5 Gbps

USB2.0 480 Mbps

20GB/s **240W**

100W Charging
Support PD 3.0 Fast Charging



20Gbps Superspeed Sync
Stable signal with no delay



4K@60Hz UHD Video Output



USB-C to C

Mirror Mode



Extend Mode




Short Description

- **Connector:** USB-C Male to USB-C Male (compatible with TB3/TB4)
- **USB standard:** USB4 Gen 2x2
- **Data rate:** Up to 20Gbps
- **Power Delivery:** Up to 240W (48V/5A), PD 3.1, E-marker chipset
- **Video support:** Up to 4K@60Hz, DP Alt Mode
- **Protocol support:** DisplayPort 1.4a, HDR10, HDCP 1.4 / 2.3, PCIe 3.0
- **Compatibility:** USB 3.2 / USB 2.0 / Thunderbolt 3
- **Length:** 3.0m
- **Color:** Black

Description

The 128384 USB4 Gen 2x2 C to C cable is designed for high-speed data transfer, ultra-high power delivery, and advanced display support for modern USB-C devices.

Built on USB4 Gen 2x2 architecture, it supports data transfer speeds of up to 20Gbps, making it ideal for fast file transfers, external SSDs, and high-bandwidth peripherals. With an integrated E-marker chipset and USB Power Delivery 3.1 support, the cable delivers up to 240W (48V/5A), enabling safe and stable charging for power-hungry laptops, workstations, and docking setups.

The cable also supports video output up to 4K@60Hz via DP Alt Mode and is compatible with DisplayPort 1.4a, HDR10, HDCP standards, and PCI Express 3.0 protocol. Fully compatible with USB 3.2, USB 2.0, and Thunderbolt 3 devices, it offers broad device interoperability while ensuring reliable performance for professional and everyday use.

Additional Information

Winkelstecker	Nein
Geschirmt	Nein
Anschluss 1	USB-C, male
Anschluss 2	USB-C, male
Zulassungen und Konformität	CE, ROHS, REACH
Lieferumfang	USB4 Gen 2x2 C to C Cable
Farbe	Schwarz
Modellnummer	128384
Kabellänge	3m
Dimensions (W x D x H).	48 x 48 x 3000 mm
Produktgewicht (kg)	0.14
USB Power Delivery (PD)	240W
Leiter-Material	Copper
Data Rate.	20Gbps
Kabelmantelmaterial	Cotton braided
Standards.	USB PD 3.1, USB 3.2 Gen 2x2

